


Tri- Proof LED fixture for IP 66, water- proof high stability isolated driver. Excellent heat dissipation on whole aluminum housing widely used for ambient lighting, maximum efficacy and minimum glare High-tech optical design. More than 50,000 hours average operating life.

The product is CE certified and all materials are in conformity with RoHS standard.

Applications : Hotel, Villas, Exhibition Hall, Shopping Mall, Institutions, and other high- grade lighting areas.

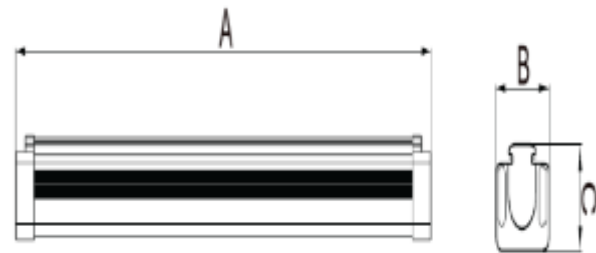

General

Dimensions A600XB86XC63
 Weight (Kg) 1.877, 2.579, 3.342, 4.096
 Installation Surface mounted
 Voltage 100-240 AC 60HZ
 Certification CE, ROHS
 Warranty 3 Years
 IP Rate IP 66

Model Number	LED QTY	Size A (mm)	Size B (mm)	Size C (mm)	Beam Angle
ALER20W2FT	108	600	83	63	110
ALER30W3FT	156	900	83	63	110
ALER40W4FT	216	1200	83	63	110
ALER50W5FT	264	1500	83	63	110
ALER65W5FT	351	1500	83	63	110

Performance

Colour Rendering Ra> 80
 Longevity 50,000 hours
 Power Factor Cos 0.9
 Exit Lumens 1900-6175 lm

Model Number	Size	Power	CCT	Light Output
	Inch	W	K	lm
ALER20W2FTFNW	2ft	20	4000	1900
ALER30W3FTFNW	3ft	30	4000	2850
ALER40W4FTFNW	4ft	40	4000	3800
ALER50W5FTFNW	5ft	50	4000	4750
ALER50W5FTFNW	5ft	65	4000	6175

Available Options

Wattage 20W- 65W
 Colour 3000K-4000K
 Bezel Frosted Diffuser
 Body PC and Aluminum
 Dimming Fixed Output, DALI Dimmable, 1-10v Dimming

