


AGAINST BAD WEATHER AND BEHAVIOR...

A versatile and robust weatherproof luminaire with a classic line design for a wide range of general and industrial applications.

- Open and closed parking areas
- Workstations
- Warehouses
- Corridors
- Production halls



- **HOUSING:** ABS - Acid, Moisture & Corrosion resistant thermo compressed (Acrylonitrile Butadiene Styrene)
- **PC** - Corrosion resistant Polycarbonate.
- **GRP** - Glass reinforced polyester
- **DIFFUSER:** PC - UV stabilized Polycarbonate diffuser. Polycarbonate
- **A** - UV stabilized Acrylic PMMA
- **GASKET:** Non ageing, single piece polyurethane/neoprene gasket
- **CLIPS:** Plastic or Stainless steel
- **WIRES:** Heat resistant wires to 105 deg C.
- **PROTECTION:** IP65

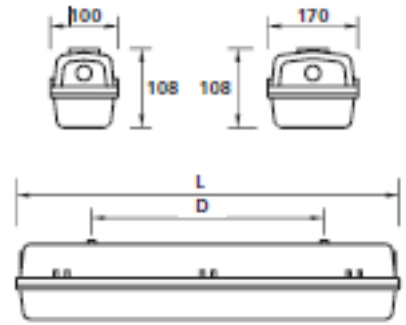

PRODUCT INFORMATION...

Light source
 Fluorescent:
 1 or 2 x MASTER TL5 / G5 / 14, 28, 35, 49 W
 1 or 2 x MASTER TL-D / G13 / 18, 36, 58 W
 Ballast Electronic, High Frequency 220 - 240 V / 50 - 60 Hz



Installation

Surface mounted
 Operating temperature: $-15^{\circ}\text{C} < T_a < 25^{\circ}\text{C}$

POLAR INTENSITY DIAGRAMS

